



UNADA COMMUTATED  
EC MOTOR

Bottle Coolers | Display Cases  
Ventilation

DATASHEET  
UC Sync Refrigeration Fan Motor




## SPECIFICATION


Rated voltage	120 / 230-240Vac, 50/60Hz
Temperature range	-40°C to +50°C
Rated current	0.4A / 0.25A
Efficiency	≤ 70%
Output power	0 – 16W
Rated speed	50Hz : 1500rpm / 60HZ : 1800rpm
Direction of rotation	CCW, CW
Reverse Speed	Timed reverse programmable options.
Motor Protection	Electrically Protected (EP)
Ground Protection	Double Insulation
Insulation Class	Class B
Bearing	608 sealed ball bearings
Approvals	UL / TÜV / CE
Ingress protection	IP65 / IP66 *

\*Option on request : Please discuss with our representative.

### PERFORMANCE : 50Hz / 1500rpm Synchronous

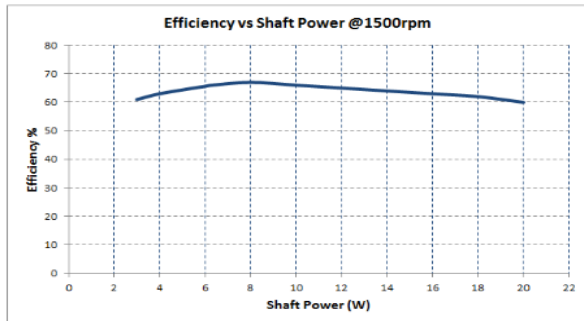

### PERFORMANCE : 60Hz / 1800rpm Synchronous

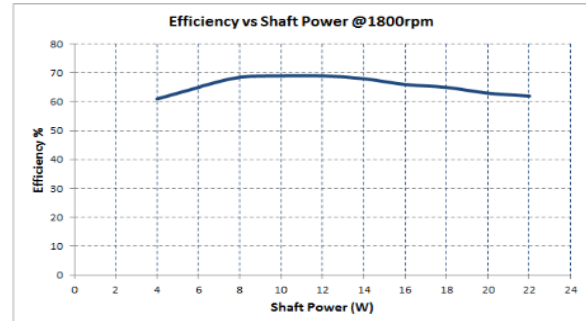

## DIMENSION

