

UNADA

LAGRANGE SERIES  
LAGRANGE 170  
LAG170DATASHEET  
LAG170


## SPECIFICATION

Rated voltage	120/230 VAC 50/60Hz
Temperature range	-40°C to +50°C
Max. input power	30 W
Rated speed	400 to 2400 RPM
Speed Selection	3 Discrete Speeds; Programmable
Direction of rotation	CCW; Reversible
Motor Protection	Electronically Protected (EP)
Ground Protection	Double Insulated
Approvals	UL / CE / TÜV / ATEX
Ingress protection	IP66
Hydrocarbon Compatibility	EN60335-2-89 ANNEX BB

## FEATURES :

- Ultra-High Efficiency
- Low Noise
- Soft Start
- Resonance mitigation
- Low Profile

## PERFORMANCE :

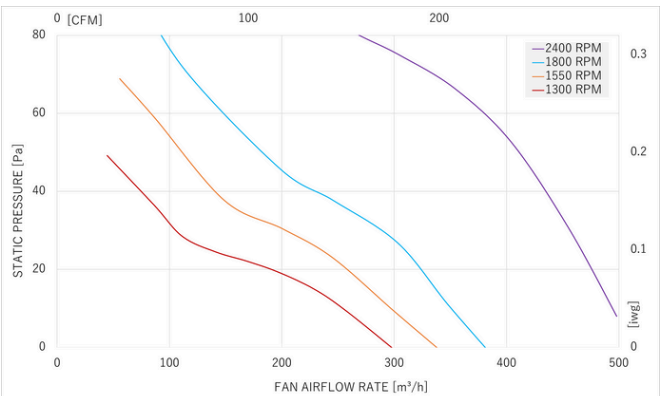

## DIMENSION :

