

UNADA

LAGRANGE SERIES
LAGRANGE 200
LAG200DATASHEET
LAG200


SPECIFICATION

| | |
|---------------------------|---------------------------------|
| Rated voltage | 110 - 240 VAC 50/60Hz |
| Temperature range | -40°C to +50°C |
| Max. input power | 43 W |
| Rated speed | 400 to 2400 RPM |
| Speed Selection | 3 Discrete Speeds; Programmable |
| Direction of rotation | CCW; Reversible |
| Motor Protection | Electronically Protected (EP) |
| Ground Protection | Double Insulated |
| Approvals | UL / CE / TÜV / ATEX |
| Ingress protection | IP66 |
| Hydrocarbon Compatibility | EN60335-2-89 ANNEX BB |

FEATURES :

- Ultra-High Efficiency
- Low Noise
- Soft Start
- Resonance mitigation
- Low Profile

PERFORMANCE :

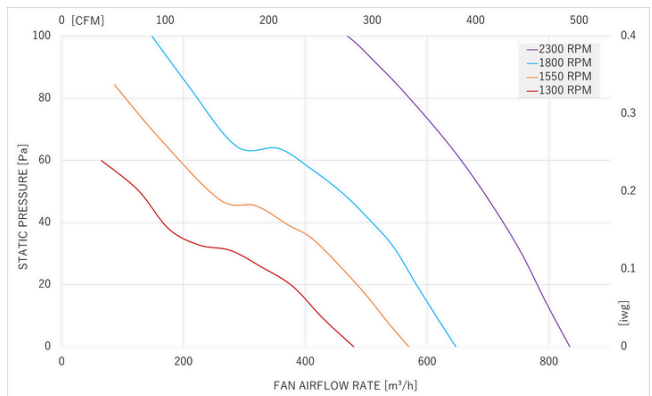

DIMENSION :

