

**UNADA**  
LAGRANGE SERIES  
**LAGRANGE 230**  
LAG230



DATASHEET  
LAG230


### SPECIFICATION

Rated voltage	110 - 240 VAC 50/60Hz
Temperature range	-40°C to +50°C
Max. input power	43 W
Rated speed	400 to 2000 RPM
Speed Selection	3 Discrete Speeds; Programmable
Direction of rotation	CCW; Reversible
Motor Protection	Electronically Protected (EP)
Ground Protection	Double Insulated
Approvals	UL / CE / TÜV
Ingress protection	IP66
Hydrocarbon Compatibility	EN60335-2-89 ANNEX BB

### FEATURES :

- Ultra-High Efficiency
- Low Noise
- Soft Start
- Resonance mitigation
- Low Profile

### PERFORMANCE :

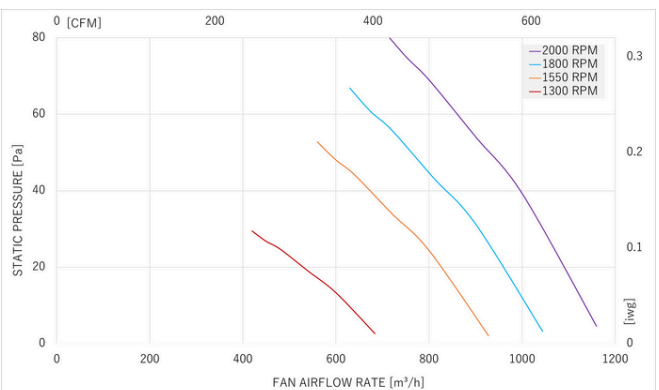

### DIMENSION :

